



## Reinforcing Bar Deformed



**Product Page:** <https://www.abaconreo.com.au/product/reinforcing-bar-deformed/>

### Product Description

#### Bars

#### **Reinforcing Bar Deformed**

Part of the reinforcing bar range is the Reinforcing Bar Deformed product, which is a normal ductility class deformed item; **type 500N** and also meets Australian Standards AS4671-2001.

AbaconREO professional reinforcing building products, including reinforcing bar items are available to both retail and wholesale buyers. Convenient pick up from our Melbourne factory or Australia wide. Request a quote today!

Do you need another reinforcing building product variation or specific quantity. We can help. Simply [click here to contact us](#) today for more information.

**Deformed Reinforcing Bar Details] Reference Diameter or size Stock  
Lengths M Mass per Metre Kg/m Metres Per Tonne m/t**

N10  
10  
6  
0.617  
79

N12  
12  
6,9,12  
0.888  
113

N16  
16  
6,9,12  
1.58  
201

N20  
20  
6,9,12  
2.47  
314

N24  
24  
12  
3.55

452

N28

28

12,15

4.83

616

N32

32

12,15

6.31

802

N36

36

12,15

7.99

1020

N40\*\*

40

L.O.A

9.86

1260

N50\*\*

50

L.O.A


15.41

1963

**\*\* Non Stock Size Items Ordered from Mill Rolling, Minimum Quantity Required.**  
Mass in the above tables are net theoretical weights per metre.  
Allow for a manufacturing tolerance as per clause 7.3 of AS4671-2001



Reinforcing Bars - [click to view full range](#)

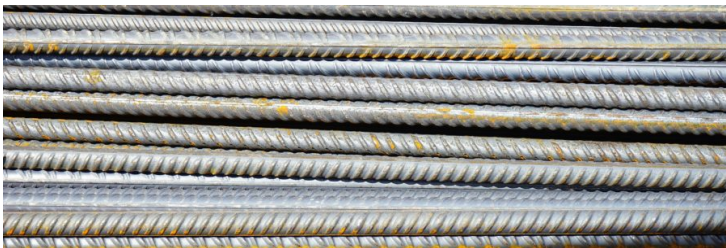

Reinforcing Bars - [click to view full range](#)



Reinforcing Bars - [click to view full range](#)

**Get pricing on deformed reinforcing bars**

Interested? Then, select your preferred reinforcing bar option from the drop down menu selection above and 'add to quote'. Finally, complete the request a quote page and we will get back to you with your desired information and pricing.

Product Variants

- 50mm
- 40mm
- 36mm
- 32mm
- 28mm
- 24mm
- 20mm
- 16mm
- 12mm
- 10mm